



ヒーティングケーブル仕様


ユニット構成図

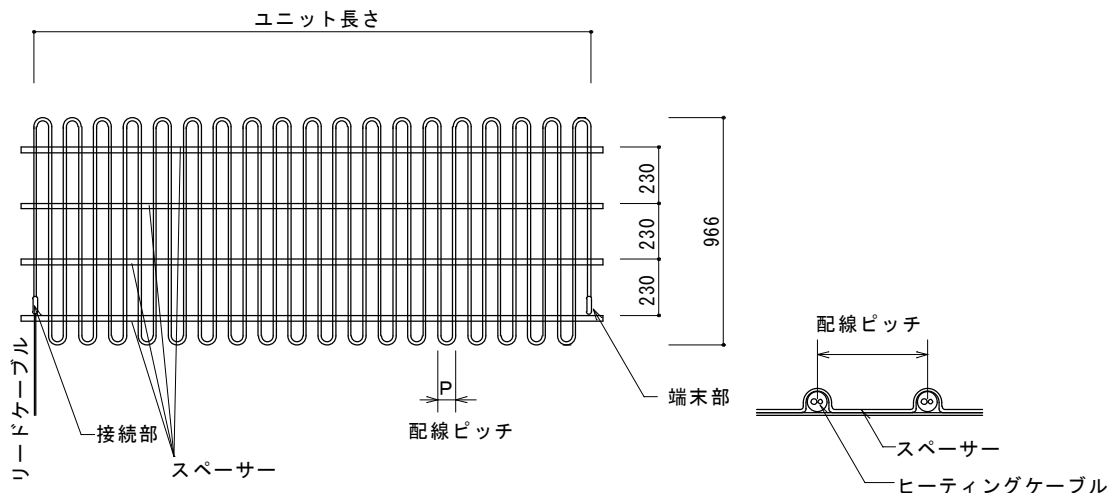

ケーブル断面図 (電磁波対応型)

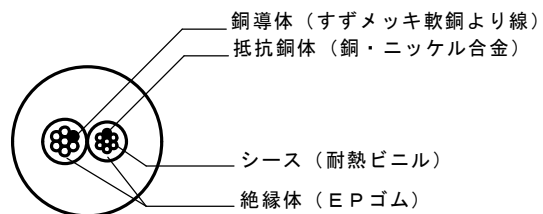

ヒーティングケーブル 外径 8.5 mm

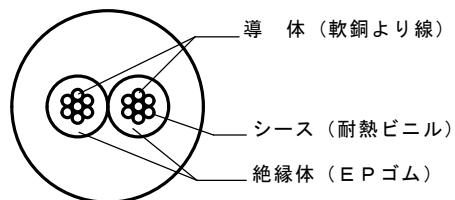

リードケーブル 外径 11.0 mm

ユニットの種類

加熱電力 (W/㎡)	記号	品名	布設面積 (㎡)	電力量 (kW)
		普通型 (HC)		
150	HC-46-5	HC-46-5	17.03	2.55
		HC-46-6	18.65	2.80
		HC-46-7	20.14	3.02
	HC-82-5	HC-82-5	12.75	1.91
		HC-82-6	13.97	2.09
		HC-82-7	15.09	2.26
	HC-120-5	HC-120-5	10.54	1.58
		HC-120-6	11.55	1.73
		HC-120-7	12.47	1.87
	HC-230-5	HC-230-5	7.61	1.14
		HC-230-6	8.34	1.25
		HC-230-7	9.01	1.35
	HC-370-5	HC-370-5	6.00	0.90
		HC-370-6	6.58	0.99
		HC-370-7	7.10	1.07
	HC-970-5	HC-970-5	3.71	0.56
		HC-970-6	4.06	0.61
		HC-970-7	4.39	0.66
200	HC-46-5	HC-46-5	14.74	2.95
		HC-46-6	16.15	3.23
		HC-46-7	17.45	3.49
	HC-82-5	HC-82-5	11.04	2.21
		HC-82-6	12.10	2.42
		HC-82-7	13.07	2.61
	HC-120-5	HC-120-5	9.13	1.83
		HC-120-6	10.00	2.00
		HC-120-7	10.80	2.16
	HC-230-5	HC-230-5	6.59	1.32
		HC-230-6	8.53	1.45
		HC-230-7	9.21	1.57
	HC-370-5	HC-370-5	6.09	1.04
		HC-370-6	7.22	1.14
		HC-370-7	7.80	1.23
	HC-970-5	HC-970-5	3.21	0.64
		HC-970-6	3.52	0.70
		HC-970-7	3.80	0.76